


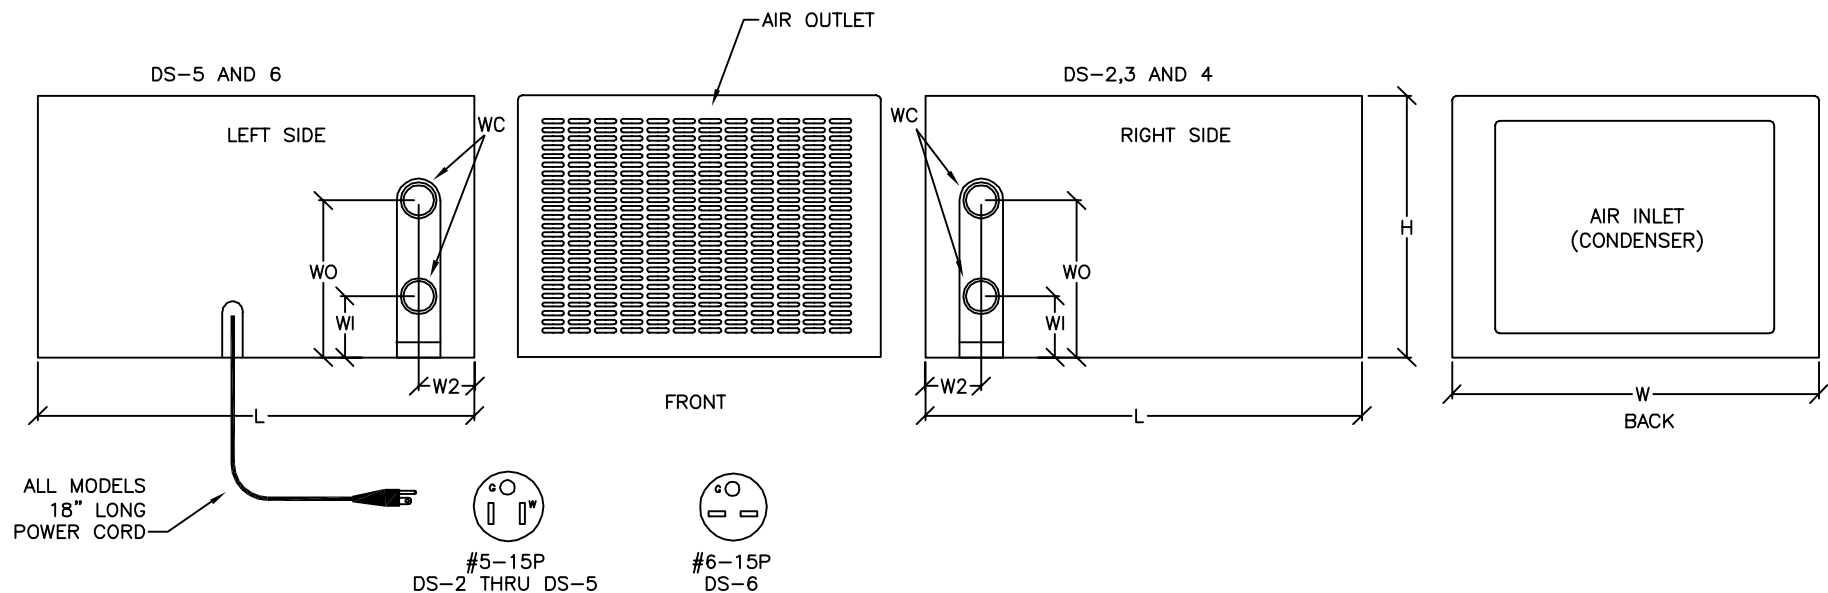

CHILLER SPECIFICATIONS

MODEL NO.	HP/TONS	NOMINAL BTUH	VOLTS / PHASE	AMPS.	WATTS	L	W	H	W2	WO	WI	R134A REFRIGERANT CHARGE (OZ.)	AIR OUTPUT (CFM)	WC WATER IN/OUT (FPT)	WATER FLOW RATE (GPM)	WEIGHT (LBS.)	SHIPPING WEIGHT (LBS.)	SHIPPING DIMENSIONS (INCHES)
DS-2	1/5	1,810	115	3.4	391	19"	12"	11"	2"	7 1/2"	3 1/2"	5.25	220	3/4	6-12	48	51	26x16x16
DS-3	1/4	3,080	115	5.4	621	19"	12"	11"	2"	7 1/2"	3 1/2"	5	240	3/4	8-15	60	65	26x16x16
DS-4	1/3	4,050	115	7.2	828	22 1/2"	13"	11"	2"	7 1/2"	3 1/2"	8	260	3/4	10-20	66	69	29x18x16
DS-5	1/2	6,000	115	9.5	1092	24"	15 1/2"	13"	3"	9"	4"	9.5	350	1 1/2	12-25	100	119	33x26x25
DS-6	1/2	6,000	230/1	4.8	1104	24"	15 1/2"	13"	3"	9"	4"	9.5	350	1 1/2	12-25	100	119	33x26x25

ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE WITHOUT NOTICE

WI=WATER INLET
WO=WATER OUTLET
WC=WATER CONNECTION SIZE

 Aqua Logic, Inc.
8268 Clairemont Mesa Blvd. Suite 302
San Diego, CA 92111

TITLE: DS-2 THRU DS-6
CHILLER SPECIFICATIONS

LAST
UPDATE: 7-19-06

DATE: 4-28-06

FILE: DS-2,3,4,5 & 6 SPEC

BY
CE