



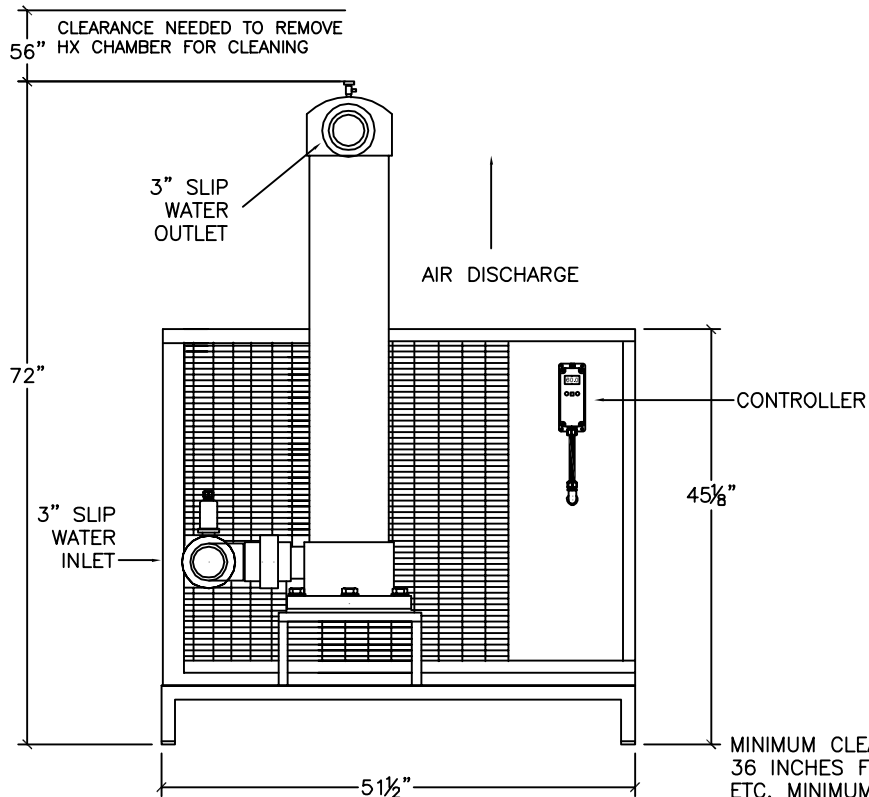

MINIMUM CLEARANCE FOR PROPER OPERATION IS 36 INCHES FROM THE WALLS, SHRUBBERY, FENCES, ETC. MINIMUM CLEARANCE BETWEEN ADJACENT UNITS IS 72 INCHES.

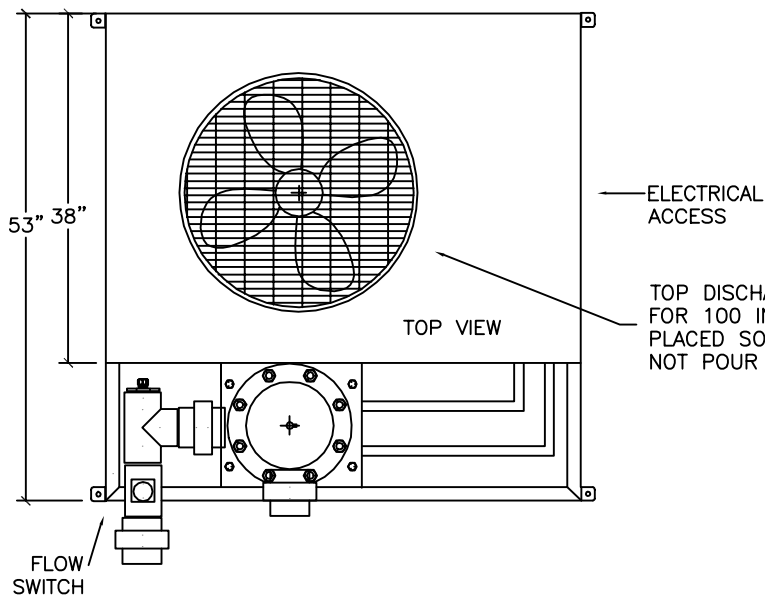

TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR 100 INCHES MINIMUM. UNIT SHOULD BE PLACED SO ROOF RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT.

SPECIFICATIONS:

MODEL NO: MT-12
 HP: 12
 VOLTS / PH / Hz 208-240 / 3 / 60
 VOLTAGE MIN-MAX 187-253
 TOTAL UNIT AMPS 50 RLA / 312 LRA
 MIN. CIRCUIT AMP. 55
 MAX. FUSE 70
 MAX. BTUH OUTPUT 148,000
 MIN - MAX WATER FLOW 120 / 180 GPM
 WEIGHT 700 LBS
 FAN CFM 8,120
 REFRIGERANT TYPE R-22
 HX CONSTRUCTION TITANIUM TUBE IN PVC SHELL



Aqua Logic, Inc.
8268 Clairemont Mesa Blvd. Suite 302
San Diego, CA 92111

TITLE: MT-12 230V 3PH

LAST
UPDATE: 10-27-06

DATE: 7-16-04

FILE:
MT-12 230v 3 Trane

BY CE